

S131

RED STRIPE
INCLINOMETER CASINGS

INCLINOMETERS
& PENDULUMS



RED STRIPE INCLINOMETER CASINGS

Inclinometer casings are special grooved tubes, generally installed into drilled holes, used in conjunction with inclinometer system or in-place inclinometers to determine sub-surface ground displacements.

Red stripe casings are made with virgin ABS and inclinometer tube assembly require drill, rivets, glue and tape.

Red-Stripe couplings create strong, twistproof joints. They fit directly onto full diameter of the casing.

APPLICATIONS

- Landslides
- Diaphragms and retaining walls
- Dams and embankments
- Deep excavations
- Tunneling
- LNG and oil tanks





FEATURES

- Low spiral
- Suitable for inclino-settlement columns
- Inert to the aggressive waters
- Suitable for all inclinometer systems in the market

RED STRIPE CASINGS

PRODUCT CODE	0S13100603M	0S13100610F
Description	metric red stripe casing	English red stripe casing
Material	ABS (Acrylonitrile-Butadiene-Styrene)	
Outer diameter (OD)	71 mm (2.8")	
Inner diameter (ID)	60 mm (2.4")	
Groove ID	65 mm (2.6")	
Thickness	3.75 mm (0.15")	
Length	3 meter	10 feet
Casing weight	2.1 kg	4.6 lb
Spiral	< 0.6° / 3 m	< 0.61° / 10 feet
Suggested borehole drilling diameter	101 mm (4")	
Temperature (max 1 hour)	+80°C (176 °F)	

PRODUCT CODE	0S131MF6000
Description	coupling for red stripe casing
Material	ABS (Acrylonitrile-Butadiene-Styrene)
Outer diameter (OD)	77 mm (3.0")
Inner diameter (ID)	67 mm (2.6")
Groove ID	71.5 mm (2.8")
Thickness	5 mm (0.2")
Length	200 mm (7.9")
Casing weight	0.20 kg (0.44 lb)
Spiral	-
Suggested borehole drilling diameter	-

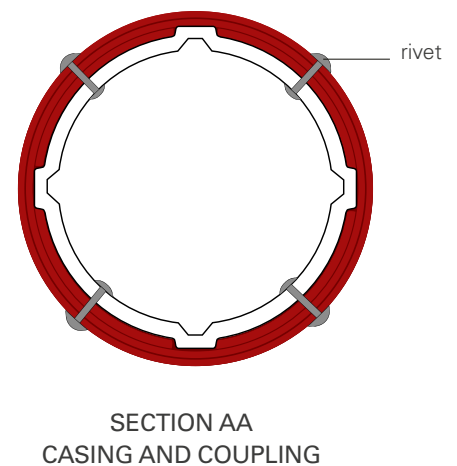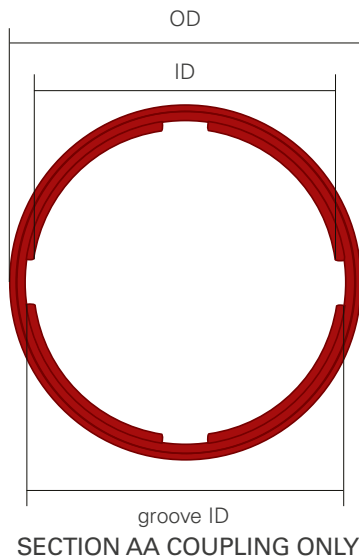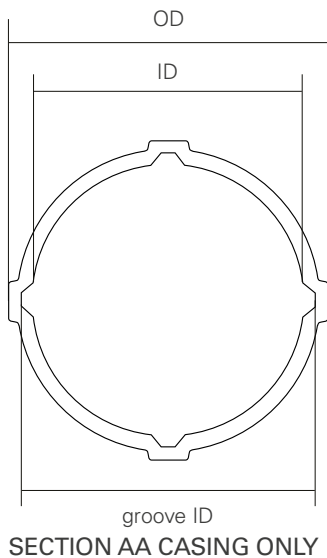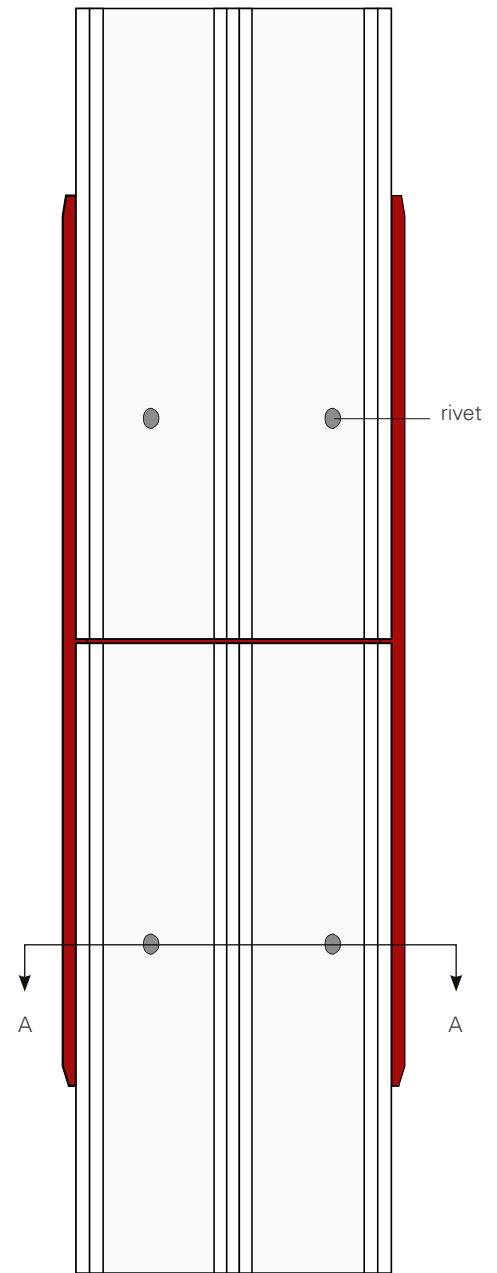

ACCESSORIES AND SPARE PARTS

S131 SIMPLE TOP CAP OS131TS6000

Simple top cap for S131 casings, made by ABS.

S131 BOTTOM CONICAL CAP OS131TF6000

Conical bottom cap for S131 casings, made by ABS.

BOTTOM GROUT CAP OS100VF6000

It substitutes the simple bottom cap when grouting is requested by using removable valve.

GROUTING VALVE OS100VR0000

This removable valve fits bottom grout cap OS100VF0000. Valve have to be connected to the injection tube and lowered into the casing.

LOCKABLE TOP CAP OS100CH1000

Consists of a 12" steel sleeve and an ABS plastic top. The sleeve is embedded in the concrete pad at the top of the casing. The top consists of a collar and a hinged lid. The collar has a clamp that holds a pulley. The lid has a survey pin and can be locked.



CASING ASSEMBLY KIT OS1ABKIT200

Suitable for 100 m of casing, it includes rivets, adhesive tape, self-amalgamating tape and three drill bits.



All the information in this document is the property of Sisgeo S.r.l. and should not be used without permission from Sisgeo S.r.l. We reserve the right to change our products without prior notice. The datasheet is issued in English and other languages. In order to avoid discrepancies and disagreement on the interpretation of the meanings, Sisgeo Srl declares that English Language prevails.

SISGEO S.R.L.

VIA F. SERPERO 4/F1
20060 MASATE (MI) ITALY
PHONE +39 02 95764130
FAX +39 02 95762011
INFO@SISGEO.COM

ADDITIONAL SUPPORT

SISGEO offers customers e-mail and phone assistance to ensure proper use of instruments and readout and to maximize performance of the system.

For more information, please refer to the FAQ pages on our website or email us: assistance@sisgeo.com